
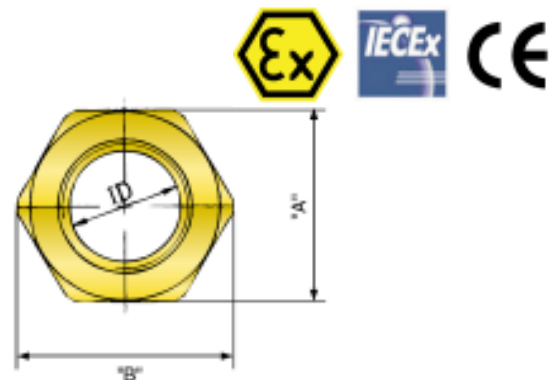


Armoured Glands – AAG Range

Applications

- Suitable for wire armour and wire braid type cables
- Double Compression seal for indoor and Outdoor use
- Operating Temperature : -60°C to +80°C
- Materials : Brass or Brass nickel plated
- Suitable for use in Zone1, Zone2, Zone21 and Zone22 areas. Gas Groups, IIA, IIB and IIC
- Flameproof Exd and Increased Safety Exe
- Ingress Protection : IP66/67 to IEC529
- Certificate Nos : Baseefa09ATEX0186X, IEC Ex: IECEx BAS 09.0088X

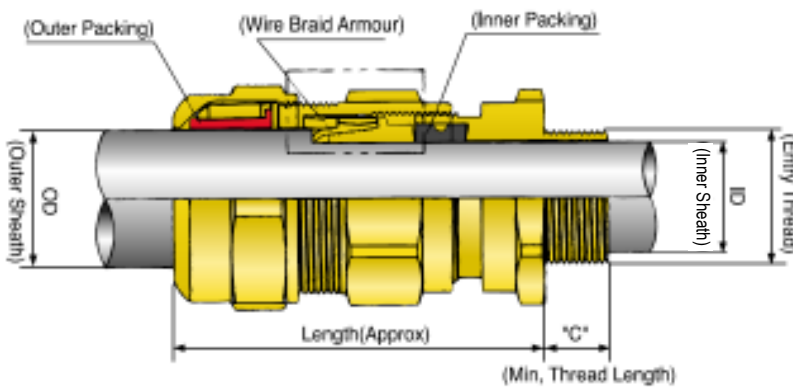

Gland Size	Entry Thread Size		Cable Acceptance Details						Hexagon Dimensions		Thread Length "C"			
			Inner Sheath 'ID'				Outer Sheath 'OD'						Armour Size	
	Metric	NPT	Standard Size		Alternative Seal (S)		Min	Max	W	X	Across Flats "A"	Across Corners "B"	Metric	NPT
			Min	Max	Min	Max								
AAG-20a	M20M16	1/2"	5.5	8.0	-	-	7.0	12.0	0.9/1.25	00.7	24.0	26.8	20.0	
AAG-20b			7.5	9.0	5.5	8.0	11.0	16.0			30.0	33.5		
AAG-20d			11.0	13.7	8.5	12.0	14.3	20.0			1.25/1.6	36.0		
AAG-25a	M25	3/4"	13.0	16.7	10.5	15.4	18.5	26.0	1.6/2.0	00.7	45.8	51.2	25.0	
AAG-32	M32	1"	20.0	23.5	15.0	21.2	24.0	33.0			25.6			
AAG-40a	M40	1 1/4"	22.0	28.0	25.0	30.0	28.0	35.0			26.0			
AAG-40	M40	1 1/4"	25.0	30.0	22.0	28.0	30.0	41.0	1.8/2.5	01.0	55.0	61.5	25.6	
AAG-50a	M50	1 1/2"	27.5	36.5	31.5	41.0	42.0	52.6			26.0			
AAG-50	M50	2"	31.5	41.0	27.5	36.5	42.0	52.6			27.0			
AAG-63a	M63	2 1/2"	39.0	47.0	42.5	53.0	46.0	56.0	1.8/2.5	01.0	80.0	89.5	40.0	
AAG-63	M63	2"	42.5	53.0	39.0	47.0	52.0	65.5			27.0			
AAG-75a	M75	2 1/2"	49.0	58.3	54.5	64.3	57.0	67.0			40.0			
AAG-75	M75	3"	54.5	64.3	49.0	58.3	64.0	78.3	1.8/3.2	01.0	95.0	104.5	41.5	
AAG-80	M80	3 1/2"	67.0	70.0	60.0	68.0	75.0	89.5			40.0			
AAG-90	M90		75.0								41.5			
AAG-100	M100	4"	76.5	89.5	70.0	81.0	88.0	104.5	1.8/3.2	01.0	107.0	114.0	20.0	42.7
											115.0	123.0		
											126.0	139.0		

Accessories

Lock-Nut, Sealing washer, Serrated washer, Earth Tag and PVC Shroud are available